


Specification:

- * Frequency Range: DC - 6 GHz
- * VSWR max: 1.2 : 1
- * PIM: <-160 dBc
(at 1800 MHz, 43dBm per tone)

Materials:

- * Inner Conductor: Silver plated BeCu
- * Outer Conductor: Silver plated brass
- * Dielectric: PTFE

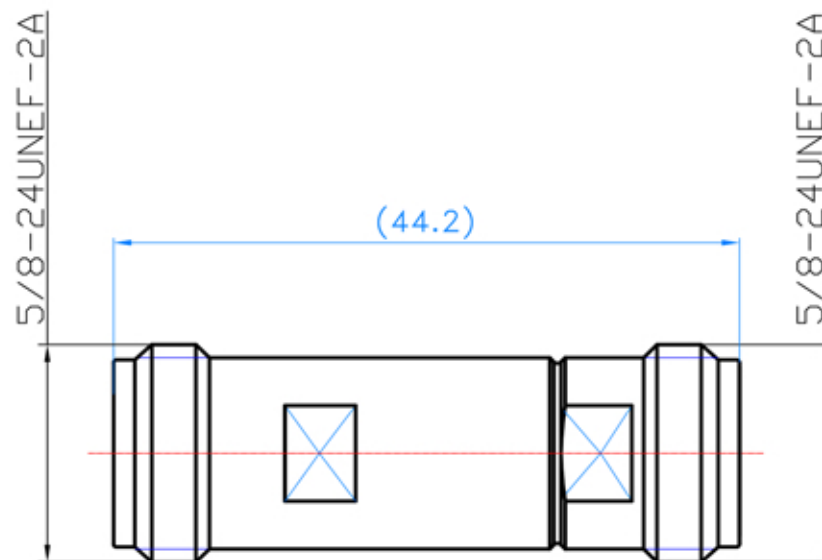

All dimension are in mm unless otherwise specified		SIZE A	SCALE NO	CAGE CODE 0T8L4	 5214 Bonsai Street Moorpark, CA (888) 498-3242 www.hasco-inc.com
		REV. A	SHEET 1/1		
DRAWING BY: P. Xie	DATE: 3/29/2013	PART NO. NJ-NJ-SLP			TITLE Low PIM adaptor N female to N female
CHECKED BY: W. Lu	DATE: 3/29/2013				
APPROVED BY: Z. Jiang	DATE: 3/29/2013				