




## Low PIM Adapter Type N Female to Type N Female

**Part No: NJ-NJ-SLP**

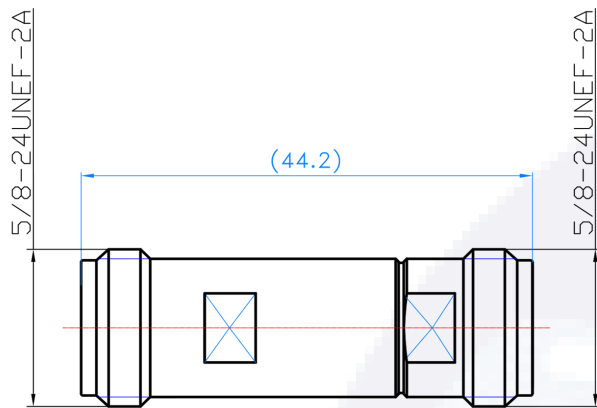

### Electrical

- **Frequency Range** DC - 6 GHz
- **VSWR** DC - 6 GHz.....1.2:1
- **Impedence** 50 Ohms
- **PIM** <-160 dBc  
(at 1800 MHz, 43dBm per two tone)

### Materials

- **Inner Conductor**  
Silver Plated Be-Cu
- **Outer Conductor**  
Silver/Trimetal Plated Brass
- **Dielectric**  
PTFE