


**Electrical**


Impedance: 50 Ohms nominal  
 Dielectrical Withstanding Voltage: 2500 VRMS at sea level.  
 Insulation Resistance: 5000 MOhms  
 Contact Resistance:  
     Center contact: 1 milliohms  
     Outer contact: 0.25 milliohms

MATERIALS		
	Materials	Typical Plating
Body	Brass	Silver (7 microns)
Insulator	PTFE	None
Center contact	Brass	Gold (1 microns)

**Mechanical**

Meet HASCO interface specification for type N  
 Suggested mating Torque: 11.45 inch-lbs  
 Coupling Proof Torque: 15 inch-lbs  
 Connector Durability: 500 matings averages

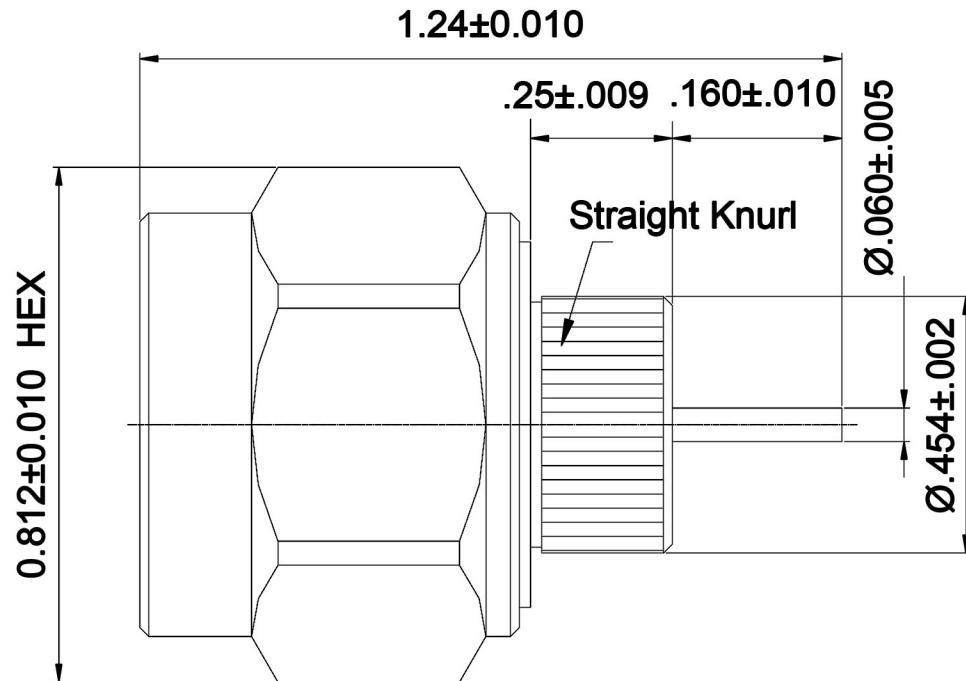

<b>All dimension are in inches</b>		SIZE A	SCALE NO	 HASCO, INC COMPONENTS DISTRIBUTOR	5214 Bonsai Street Moorpark, CA (888) 498-3242 www.hasco-inc.com
DRAWING BY: J. Smith	DATE: 3/18/2005	REV. A	SHEET 1/1		
CHECKED BY: C. Wang	DATE: 3/18/2005	PART NO. HA-N-PP-002A		TITLE <b>N Press Fit Male Receptacle</b>	
APPROVED BY: C. Wang	DATE: 3/18/2005				