
Part No:

HT26F-2GB

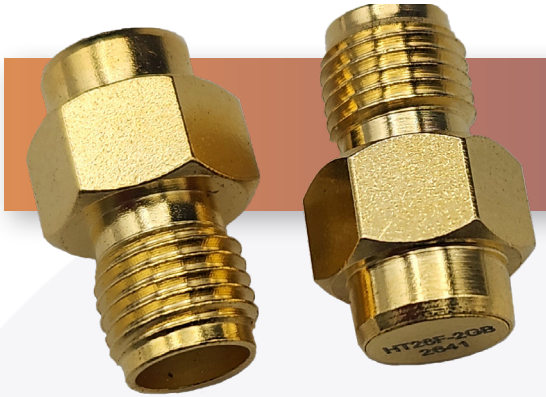

SMA Female Termination, 2 Watts - 26.5 GHz

Features

- RoHs Compliant

The HASCO **HT26F-2GB** is an SMA Female Termination that is rated for 2 Watts and will operate to 26.5 GHz. The SMA termination was developed for dense connector application, 5G requirements and high speed simi-conductor testing. HASCO stocks an extensive selection of RF Loads, also known as Terminations. They are used to prevent signals from flowing back into a transmission line causing unwanted distortion and power loss. Terminations are available for coaxial transmission lines and waveguide.

Electrical

• Impedance	50 Ω
• Frequency Range	DC - 26.5 GHz
• VSWR	1.25:1 @ 18 GHz
	1.30:1 @ 26.5 GHz
• Power Handling	2 Watts average @ 25°C

Environmental

• Temperature Range	-55°C to 100°C

Material


• Connector Body & Nut	Gold plated Brass
• Dielectric	PTFE
• Center Contact	Gold Plated Brass

Product specifications subject to change without notification.

5214 Bonsai Avenue • Moorpark, CA 93021| (888) 498-3242 • sales@hasco-inc.com | www.hasco-inc.com

© 2026 HASCO RF

SMA Female Termination, 2 Watt | DC - 26.5 GHz | Outline Drawing

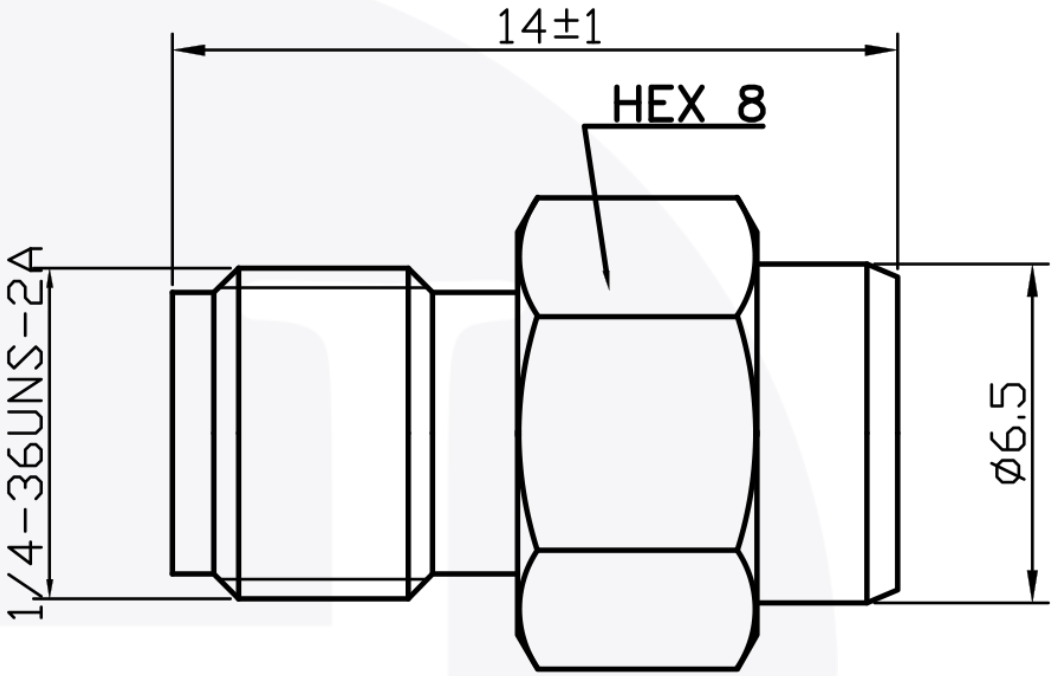

LTR	DESCRIPTION	DATE	APPR.
-	RELEASE	10/26	TC

THIS DRAWING IS A CONTROLLED DOCUMENT

DRAWN BY: *NS* | REVIEWED BY: *JS*

APPROVED BY: *TC*

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.

HASCO | RF
5214 Bonsai Avenue • Moorpark, CA 93021
(888) 498-3242 • sales@hasco-inc.com
www.hasco-inc.com

MATERIALS:	CAGE CODE:	SCALE:	SIZE:
SEE DATA SHEET	0T8L4	N/A	A
FINISHES: SEE DATA SHEET	PART NO./DRAWING NO. **HT26F-2GB**		REV: -

Product specifications subject to change without notification.

© 2026 HASCO RF