


ELECTRICAL SPECIFICATONS

FREQUENCY RANGE (GHz):	DC-40 GHz
IMPEDANCE (NOMINAL):	50 Ohms
VSWR:	1.25:1 MAX
POWER:	2 WATTS (@25°C Derates linearly to 10% @ +125°C)
OPERATING TEMPERATURE:	-55°c To +125°c

MECHANICAL SPECIFICATIONS

HOUSING:	PASSIVATED STAINLESS STEEL IAW ASTM-A484 & ASTM-A582, Alloy 303, Cond. A
CONTACT	BeCu, Gold Plated IAW MIL-PRF-39012
DIELECTRIC:	HIGH TEMPERATURE PLASTIC BEAD

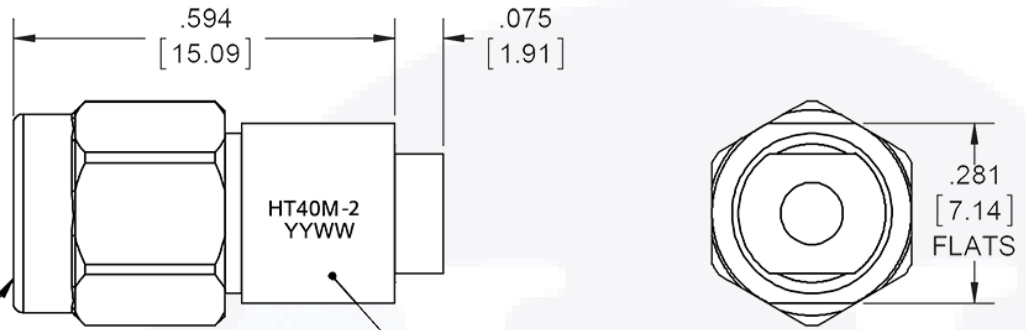

INTERFACE IAW MIL-STD-348 FOR 2.9mm (SMK) AND MATES WITH ALL SMA CONNECTORS AS WELL

To view online, go to: <https://www.hasco-inc.com/terminations/2-watt-rf-load-termination-with-2-92mm-male-connector-dc-40-ghz/>

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: ABC	CHECKED BY: ABC
-	RELEASE	12/16	TAC	APPROVED BY: ABC	
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.	
THIS DRAWING IS A CONTROLLED DOCUMENT					



5214 Bonsai Street • Moorpark, CA 93021
(888) 498-3242 • sales@hasco-inc.com
www.hasco-inc.com

MATERIALS: SEE DATA SHEET	CAGE CODE: 0T8L4	SCALE: N/A	SIZE: A
FINISHES: SEE DATA SHEET	PART NO./DRAWING NO. HT40M-2		REV: -