

Part No:

HWLPT62-2-ES



***WR-62 Low Power Waveguide Termination, 2 W Average,
5 KW Max - 12.4 GHz to 18 GHz***

Electrical

- Frequency Range 12.4 - 18 GHz
- VSWR 1.20:1 Max
- Average Power 2 W
- Peak Power 5 KW
- Temperature Range -54°C to 85°C

Material


- Material 6061 Aluminum Alloy
- Finish Clear Chem Film


HWLPT62-2-ES is a general purpose WR-62 waveguide termination from HASCO. This waveguide termination will operate from 12.4 to 18 GHz. A Waveguide Termination is a passive RF device specifically designed to prevent RF signals from reflecting back from open-ended or unused waveguide ports. Waveguide Terminations dissipate RF energy by producing heat energy. HASCO offers a series of waveguide terminations covering the waveguide sizes WR-10, WR-12, WR-15, WR-19, WR-22, WR-28, WR-34, WR-42, WR-51, WR-62, WR-75, WR-90 and WR-112.

The HWLPT62-2-ES is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

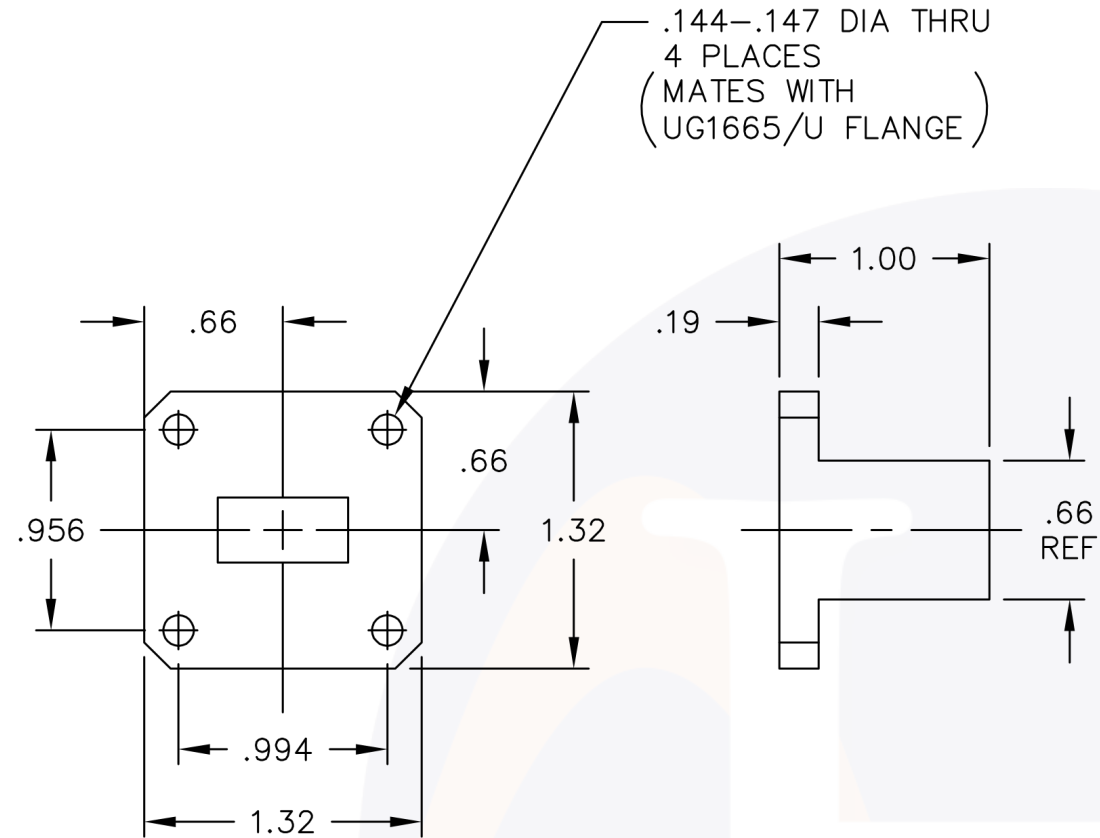

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: NS		<div><div></div><div>HASCO COMPONENTS</div></div> <div>5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com</div>		
-	RELEASE	7/23	TC	REVIEWED BY: JS	APPROVED BY: TC			
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.				
THIS DRAWING IS A CONTROLLED DOCUMENT				MATERIALS:		CAGE CODE:	SCALE:	SIZE:
				SEE DATA SHEET		OT8L4	N/A	A
				FINISHES:		PART NO./DRAWING NO.		REV:
				SEE DATA SHEET		HWLPT62-2-ES		-