

Part No:

HWLPT75-2-ES



*WR-75 Low Power Waveguide Termination, 2 W Average,
5 KW Max - 10 GHz to 15 GHz*

Electrical

- Frequency Range 10 - 15 GHz
- VSWR 1.20:1 Max
- Average Power 2 W
- Peak Power 5 KW
- Temperature Range -54°C to 85°C

Material

- Material 6061 Aluminum Alloy
- Finish Clear Chem Film


HWLPT75-2-ES is a general purpose WR-75 waveguide termination from HASCO. This waveguide termination will operate from 10 to 15 GHz. A Waveguide Termination is a passive RF device specifically designed to prevent RF signals from reflecting back from open-ended or unused waveguide ports. Waveguide Terminations dissipate RF energy by producing heat energy. HASCO offers a series of waveguide terminations covering the waveguide sizes WR-10, WR-12, WR-15, WR-19, WR-22, WR-28, WR-34, WR-42, WR-51, WR-62, WR-75, WR-90 and WR-112.


The HWLPT75-2-ES is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

WR-75 Low Power Waveguide Termination | 10 - 15 GHz | Outline Drawing

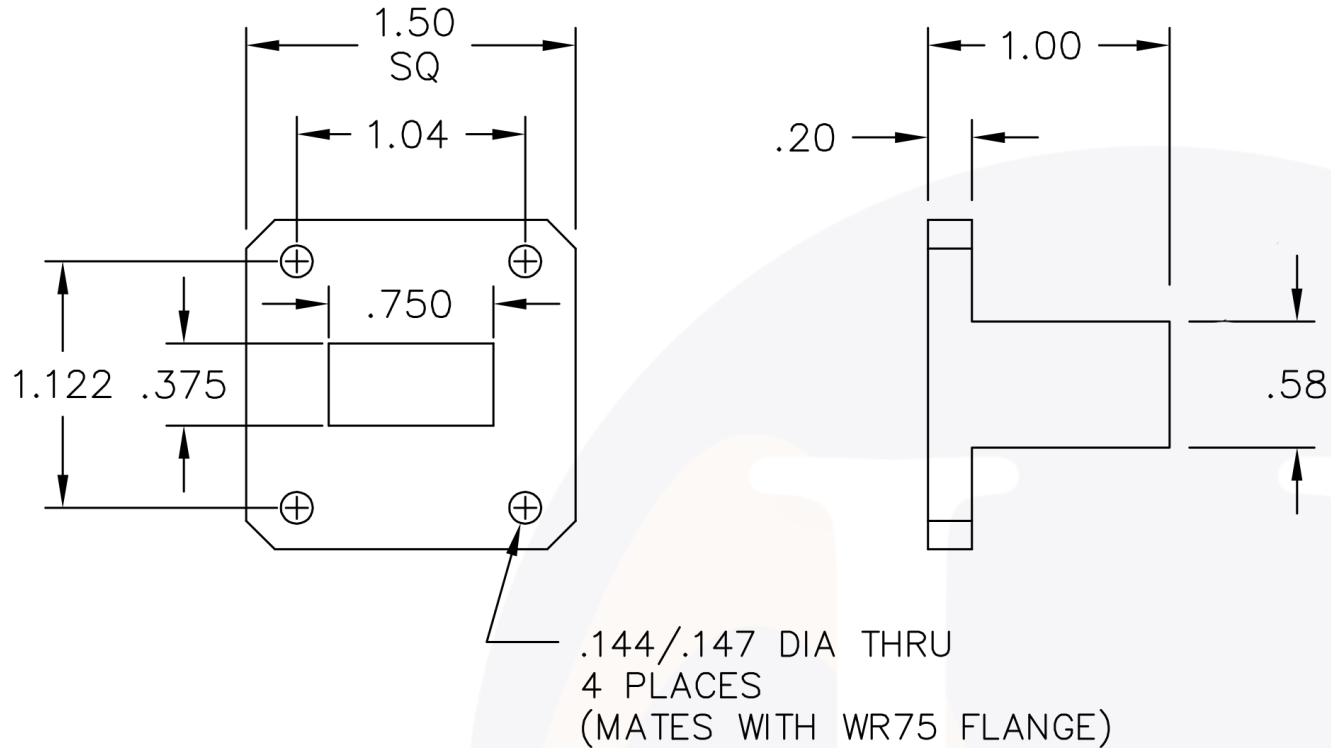

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: NS		 5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com		
-	RELEASE	7/23	TC	REVIEWED BY: JS	APPROVED BY: TC			
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.				
				MATERIALS:	SEE DATA SHEET	CAGE CODE: OT8L4	SCALE: N/A	SIZE: A
				FINISHES:	SEE DATA SHEET	PART NO./DRAWING NO. HWLPT75-2-ES		REV: -
THIS DRAWING IS A CONTROLLED DOCUMENT								