# HWSS42-1.0-ES





The HASCO WR-42 Millimeter Waveguide Straight Section **HWSS42-1.0-ES** operates from 18 GHz to 26.5 GHz. This WR-42, K-Band waveguide straight section is constructed with a Square UG-595/U Flange.

HASCO rectangular waveguides are manufactured from brass, OFHC copper, aluminum or coin silver. Waveguides have significant advantages over coaxial transmission in power handling, insertion loss and signal integrity (leakage and electromagnetic interference - EMI).

HASCO offers a series of millimeter waveguide straight sections, E-Bends, H-Bends and 90° Twists. Anti-cocking flanges available if required. All are available in standard and custom lengths covering the waveguide sizes WR-3, WR-4, WR-5, WR-6, WR-8, WR-10, WR-12, WR-15, WR-19, WR-22, WR-28, WR-34 and WR-42. Square waveguide flanges are available in WR-22, WR-28, WR-34 and WR-42. Please contact HASCO for custom options.

# WR-42 Millimeter Waveguide Straight Section, 1 Inch 18 GHz to 26.5 GHz, K-Band

## **Specifications**

• Frequency Range 18 GHz to 26.5 GHz

• VSWR 1.02:1

• Impedence 50 Ohms

• Length 1 inch

• RF Ports WR-42 Waveguide with UG-595/U Flange

#### **Environmental Data**


• Temperature Range 220°C Max


### Material

• Waveguide OFHC Copper

• Flange Square UG-595/U, Brass

• Finish Gold Plated per MIL-DTL-45204



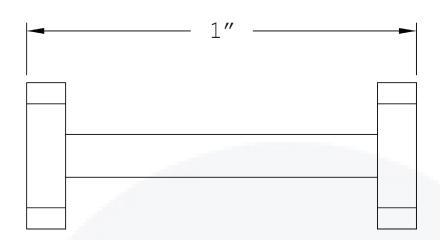

Part Number	WG Size DIM A		DIM B	
HWSS42-X.X-ES	WR-42	0.420	0.170	
HWSS34-X.X-ES	WR-34	0.340	0.170	
HWSS28-X.X-ES	WR-28	0.280	0.140	

LTR	DESCRIPTION	DATE	APPR.	CREATED BY: JMS	СНЕСКЕД ВУ: <i>ТАС</i>		
-	RELEASE	08/19	TAC	APPROVED BY: TAC			
				PROPERTY OF HASCO CO	SPECIFICATIONS ARE THE OMPONENTS AND SHALL COPIED NOR USED - IN		
				WHOLE OR IN PART - AS	THE BASIS FOR THE MAN- OTHER ITEMS WITHOUT		
				THE EXPRESS, WRITTEN PERMISSION OF HASC COMPONENTS.			

THIS DRAWING IS A CONTROLLED DOCUMENT



5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com

	MATERIALS: SEE DATA SHEET	CAGE CODE: 0T8L4	SCALE: N/A	SIZE:	Α
)			REV:		
	FINISHES: SEE DATA SHEET	HWSS42-1.0-ES			

Product specifications subject to change without notification.