

Part No:

HWLPT51-1-ES



WR-51, Millimeter Waveguide Termination - 15 to 22 GHz

Electrical

- Impedance 50 Ohms
- Frequency Range 15 - 22 GHz
- VSWR 1.20:1 Max.
- Power 1.0 W Average; 2.0 KW Max.
- Length 3 inch

Material

- Housing 6061 Aluminum Alloy
- Finish -R clear (RoHS) Chem Film; PER MIL-STD-100

Note: All plating thickness values are in micro-inches.


The HASCO **HWLPT51-1-ES** is a general purpose WR-51 millimeter waveguide termination from HASCO. This waveguide termination will operate up to 22 GHz.


The HWLPT51-1-ES is RoHS compliant.



HASCO stocks an extensive selection of Coaxial and Waveguide Termination Loads. Our Coax Terminations are in-stock and available in both Male and Female connectors for 1.85mm, 2.40mm, 2.92mm, SMA, Type N, TNC, 4.3-10 and 7/16 designs. Waveguide Loads come in WR-10, WR-12 and WR-15 designs with UG-385 and UG-387 standard interfaces.

WR-51, Millimeter Waveguide Termination | DC ~ 15-22 GHz | Outline Drawing

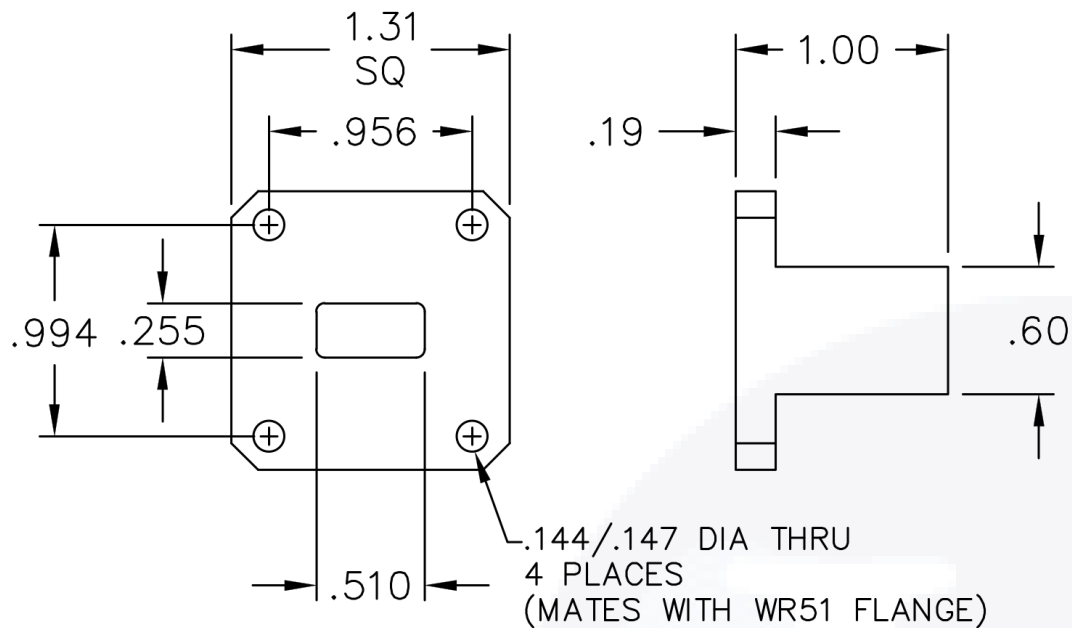

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: NS	CHECKED BY: JMS		5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com			
-	RELEASE	07/22	TAC	APPROVED BY: TAC						
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.			MATERIALS:	CAGE CODE:	SCALE:	SIZE:
							SEE DATA SHEET	OT8L4	N/A	A
							FINISHES:	PART NO./DRAWING NO.		REV:
							SEE DATA SHEET	HWLPT51-1-ES		B
THIS DRAWING IS A CONTROLLED DOCUMENT										