HWTW34-2-ES





The HASCO WR-34 Millimeter Waveguide 90° Twist **HWTW34-2-ES** operates from 22 GHz to 33 GHz. This WR-34, waveguide 90° twist is constructed with a Square UG-595/U-M Flange.

HASCO rectangular waveguides are manufactured from brass, OFHC copper, aluminum or coin silver. Waveguides have significant advantages over coaxial transmission in power handling, insertion loss and signal integrity (leakage and electromagnetic interference - EMI).

HASCO offers a series of millimeter waveguide straight sections, E-Bends, H-Bends and 90° Twists. Anti-cocking flanges available if required. All are available in standard and custom lengths covering the waveguide sizes WR-3, WR-4, WR-5, WR-6, WR-8, WR-10, WR-12, WR-15, WR-19, WR-22, WR-28, WR-34 and WR-42. Square waveguide flanges are available in WR-22, WR-28, WR-34 and WR-42. Please contact HASCO for custom options.

WR-34 Millimeter Waveguide 90° Twist, 2 Inch 22 GHz to 33 GHz,

Specifications

• Frequency Range 22 GHz to 33 GHz

• VSWR 1.02:1

Impedence 50 Ohms

• Length 2 inch

• RF Ports WR-34 Waveguide with UG-595/U-M Flange

Environmental Data


• Temperature Range 220°C Max

Material


• Waveguide OFHC Copper


• Flange Square UG-595/U-M, Brass

• Finish Gold Plated per MIL-DTL-45204



THIS DRAWING IS A CONTROLLED DOCUMENT

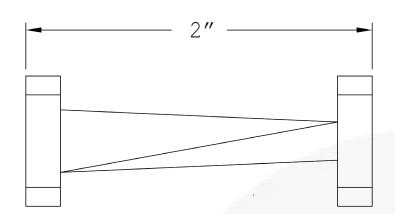



Part Number	WG Size	DIM A	DIM B	
HWTW42-X-ES	WR-42	0.420	0.170	
HWTW34-X-ES	WR-34	0.340	0.170	
HWTW28-X-ES	WR-28	0.280	0.140	

LTR	DESCRIPTION	DATE	APPR.	CREATED BY: JMS	CHECKED BY: TAC		
-	RELEASE	08/19	TAC	APPROVED BY: TAC			
				THESE DRAWINGS AND :			
				NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MAN- UFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.			



5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com www.hasco-inc.com

	MATERIALS:	CAGE CODE:	SCALE:	SIZE:			
	SEE DATA SHEET	0T8L4	N/A	F	A		
				257			
	FINISHES:	PART NO./DRAWING NO.	REV:				
	SEE DATA SHEET	HWTW34-2-ES					

Product specifications subject to change without notification.