

Part No:

# NP-35P-MM



## Type N Male to 3.5mm Male Adapter - 18 GHz

### Electrical

• Impedance	50 Ohms
• Frequency Range	DC - 18 GHz
• VSWR	1.15:1 Max
• Insertion Loss	$\leq 0.05 \times f(\text{GHz})$ dB
• Insulation Resistance	$\geq 5000$ M $\Omega$
• Diel. Withstanding Voltage	1100 V rms @ Sea Level
• Working Voltage	335 V rms @ Sea Level
• Temperature Range	-65°C to 165°C

### Material

• Body & Coupling Nut	Passivated Stainless Steel
• Insulator	Teflon
• Contact	BeCu (Plating: Gold 4 over Nickel-Phosphorus Alloy 80 over Copper 20)
• Retainer Ring	Brass (Plating: Tin-Zinc-Copper Alloy 100 over Copper 80)
• Gasket	Silicon


The HASCO **NP-35P-MM** is a general purpose Type N Male to 3.5mm Male between-series adapter from HASCO. This between-series coaxial adapter will operate up to 18 GHz.

The NP-35P-MM is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

Type N Male to 3.5mm Male Adapter | DC ~ 18 GHz | Outline Drawing

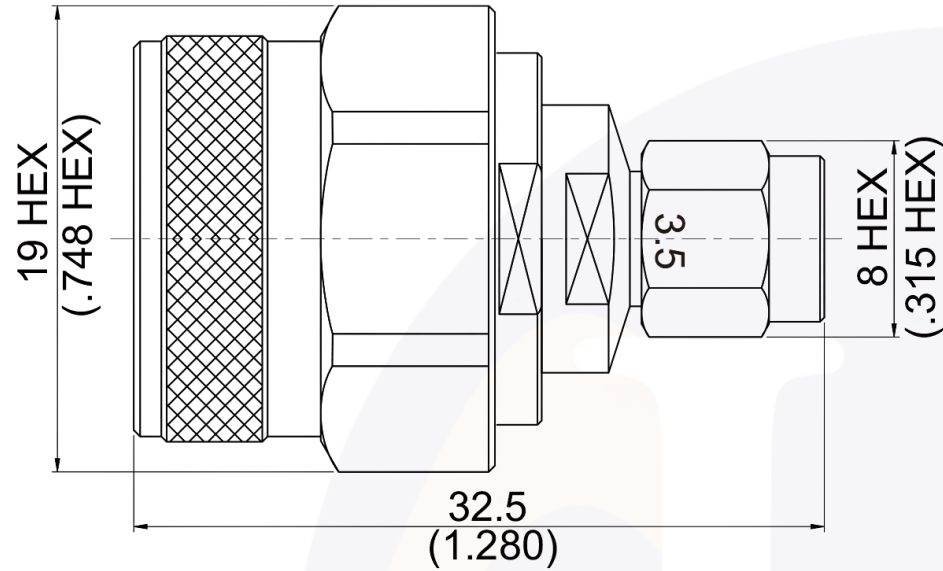

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: <i>NS</i>	CHECKED BY: <i>JMS</i>
-	RELEASE	10/22	TAC	APPROVED BY: <i>TAC</i>	
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.	
THIS DRAWING IS A CONTROLLED DOCUMENT					



5214 Bonsai Street • Moorpark, CA 93021  
 (888) 498-3242 • sales@hasco-inc.com  
[www.hasco-inc.com](http://www.hasco-inc.com)

MATERIALS: SEE DATA SHEET	CAGE CODE: 0T8L4	SCALE: N/A	SIZE: A
FINISHES: SEE DATA SHEET	PART NO./DRAWING NO. <b>NP-35P-MM</b>		REV: -