


Part No:

# HAD-SMAJ-HUMCJ

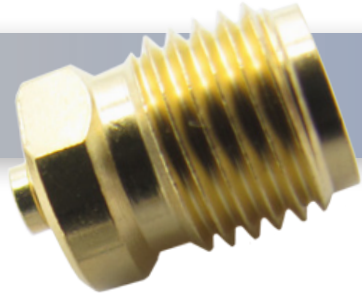

## *SMA Female to IPEX Female General Purpose Adapter - 18 GHz*

### Electrical

- Impedance 50 Ohms
- Frequency Range DC - 6 GHz
- VSWR 1.20:1 Max

### Material

Note: All plating thickness values are in micro-inches.

- Body Brass (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)
- Contact Pin Brass (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)
- Retainer Ring BeCu (Plating: Gold 4 over Nickel Phosphorous Alloy 80 over Copper 20)
- Insulator Teflon
- Gasket Silicone


The HASCO **HAD-SMAJ-HUMCJ** is a general purpose SMA Female to IPEX Female between-series adapter from HASCO. This between-series coaxial adapter will operate up to 6 GHz. The HUMC mates with U.FL, IPEX, UMCC, UMCX, and other U.FL compatible connectors.


The HAD-SMAJ-HUMCJ is RoHS compliant.



HASCO stocks an extensive selection of RF and Microwave between-series, in-series, right angle and low PIM adapters.

# SMA Female to HUMC Female Adapter | DC ~ 6 GHz | Outline Drawing

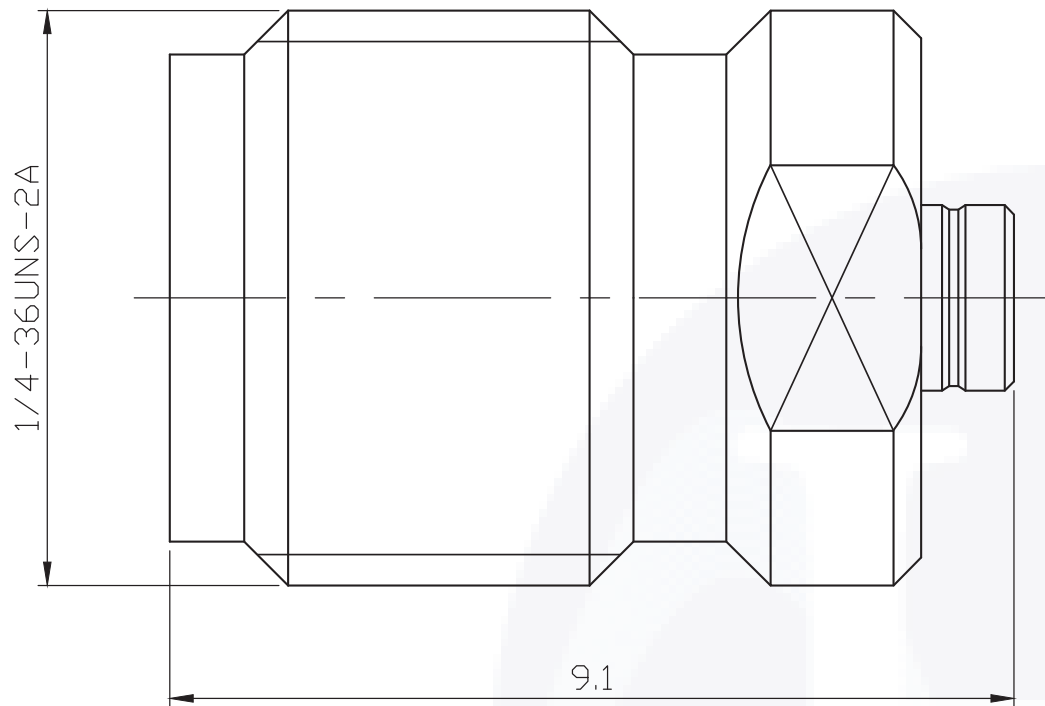

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: <i>JMS</i>	CHECKED BY: <i>JMS</i>		5214 Bonsai Street • Moorpark, CA 93021 (888) 498-3242 • sales@hasco-inc.com <a href="http://www.hasco-inc.com">www.hasco-inc.com</a>		
-	RELEASE	07/21	TAC	APPROVED BY: <i>TAC</i>					
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:	CAGE CODE:	SCALE:	SIZE:
						SEE DATA SHEET	0T8L4	N/A	A
						FINISHES:	PART NO./DRAWING NO.		REV:
						SEE DATA SHEET	<b>HAD-SMAJ-HUMCJ</b>		-
THIS DRAWING IS A CONTROLLED DOCUMENT									