


Part No:

BPF-WH1-60000-500-4-15

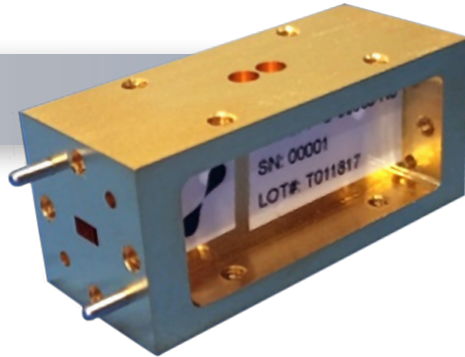

The BPF-WH1-60000-500-4-15 is a WR-15 V-Band Band-pass Filter with narrow pass-band. It is a 4 section filter with 1.7dB insertion loss. It is 1.7 inches in length. Input and output are WR-15 UG385/U.


Key Features of the BPF-WH1-60000-500-4-15:


- Narrow Bandwidth
- Great return loss



V-Band Band-Pass Filter • 58.8-59.6 GHz

Parameters

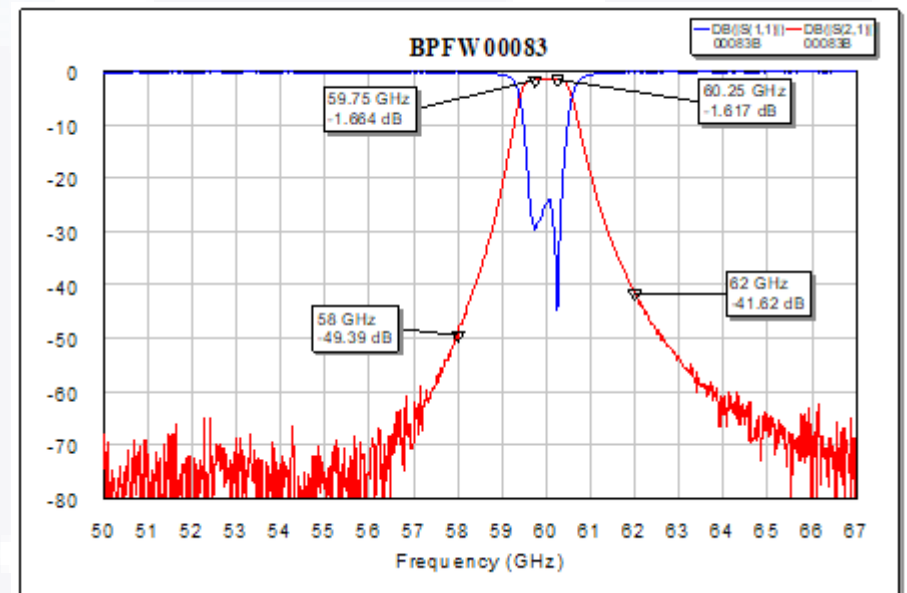Pass-Band Frequency	59.75 - 60.25 GHz
Insertion Loss	1.7 dB @ Fc
Return Loss	>21dB
Rejection @ 58 GHz	>45dB
Rejection @ 62GHz	>35dB
Operating Temperature	-25°C to +75°C
Housing Material	Gold Plated Aluminum 6061
Weight	100g

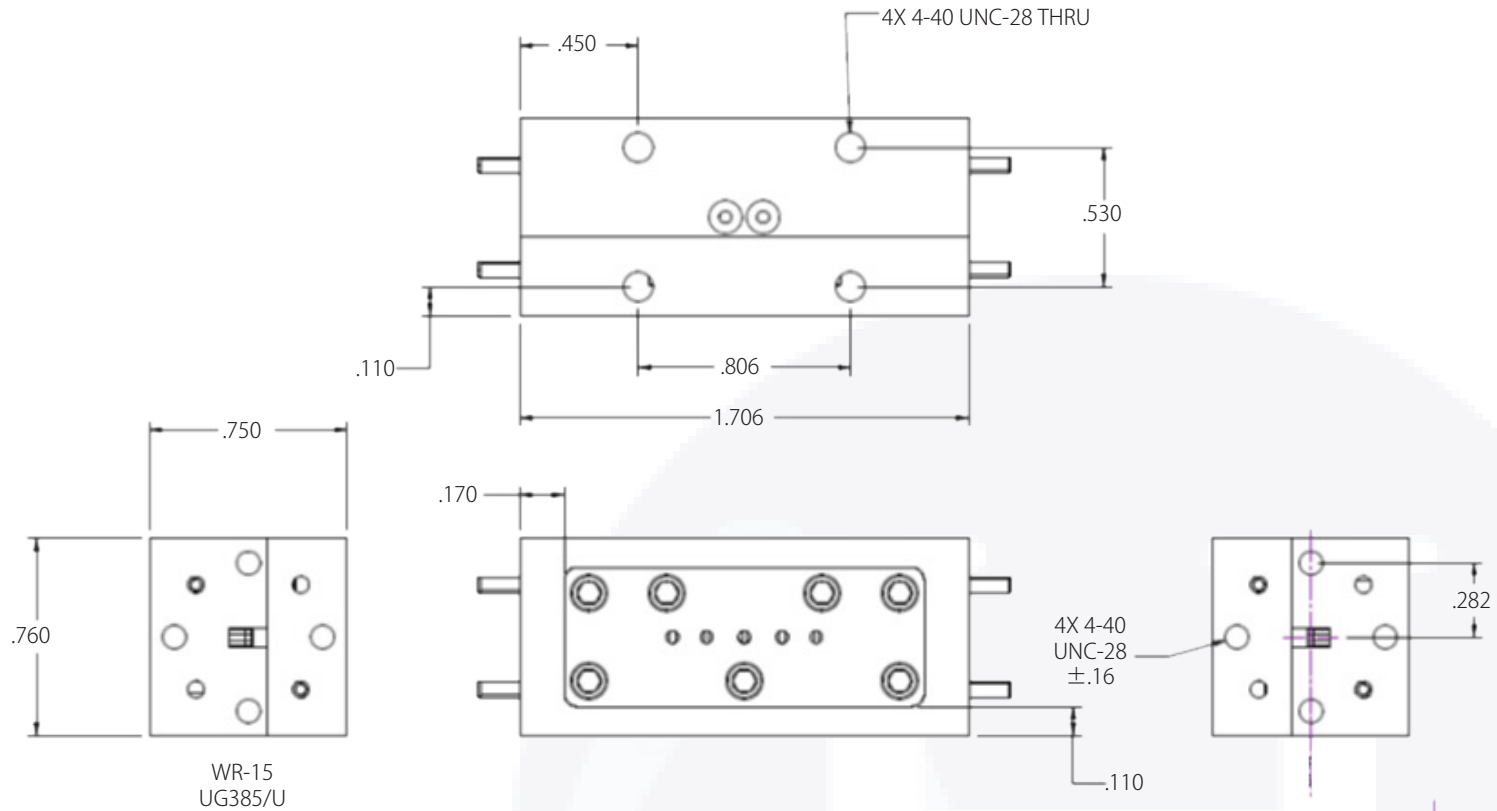



LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: ABC	CHECKED BY: ABC	 		5214 Bonsai Street Moorpark, CA 93021 (888) 498-3242 sales@hasco-inc.com www.hasco-inc.com	
-	RELEASE	12/16	TAC	APPROVED BY: ABC					
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.		MATERIALS:	CAGE CODE:	SCALE:	SIZE:
				TOLERANCES - UNLESS OTHERWISE NOTED:		SEE DATA SHEET	OT8L4	N/A	-
				DECIMALS INCHES MM .X" .075" [1.9] .XX" .050" [1.3] .XXX" .030" [0.76]		FINISHES:	PART NO./DRAWING NO.		REV:
THIS DRAWING IS A CONTROLLED DOCUMENT						SEE DATA SHEET	BPF-WH1-60000-500-4-15		-