## HA65A-10





# 10 dB - Fixed Attenuator 1.85mm Male To 1.85mm Female Up To 65 GHz Rated To 1 Watt With Passivated Stainless Steel Body

The HASCO Fixed Attenuator **HA65A-10** is rated to 1 Watts and operates from DC to 65GHz. The versatile coaxial package uses 1.85mm male to 1.85mm female connectors.

The HA65A-10 is RoHS compliant.



RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

#### **Electrical**

<ul> <li>Frequency Range</li> </ul>	DC - 65 GHz
-------------------------------------	-------------

<ul> <li>Attenuation Accuracy</li> </ul>	DC-26.5 GHz	26.5-40 GHz	40-50 GHz	50-65 GHz
1-9 dB	± 0.75 dB	± 1.00 dB	±1.50 dB	±1.50 dB
10 dB	± 0.75 dB	± 1.25 dB	±1.50 dB	±1.75 dB
20 dB	±1.00 dB	±1.25 dB	±2.00 dB	±2.50 dB
30 dB	±1.25 dB	±1.50 dB	±2.00 dB	±5.50 dB
• VSWR	1.35:1	1.55:1	1.55:1	1.65:1

• Impedence 50 Ohms

Power 1 Watt Average

Derates linearly to 10% @ 100°C from +25°C

### **Environmental Data**

• Temperature Range -55°C - +100°C

#### **Material**

• Dielectric High Temperature Plastic Bead


Contact Beryllium Copper

Housing Passivated Stainless Steel IAW

ASTM-A484 & ASTM-A582, Alloy 303 Cond A

Conductor Gold Plated IAW MIL-PRF-39012

To view online, go to: https://www.hasco-inc.com/attenuators/10-db-fixed-attenuator-1-85mm-male-to-1-85mm-female-up-to-65-ghz-rated-to-1-watt-with-passivated-stainless-steel-body/

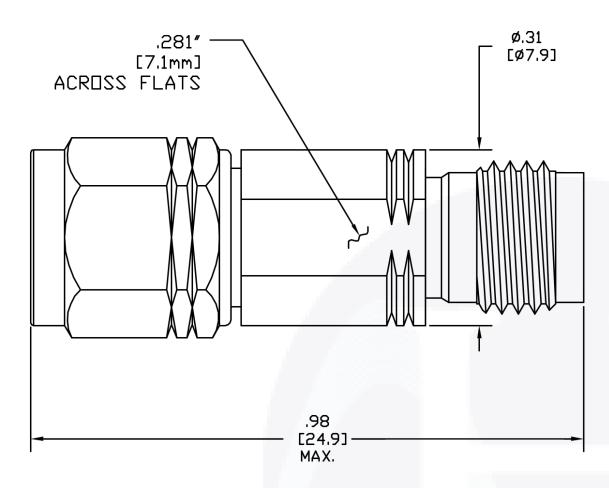

To view online, go to: https://www.hasco-inc.com/attenuators/10-db-fixed-attenuator-1-85mm-female-up-to-65-ghz-rated-to-1-watt-with-passivated-stainless-steel-body/

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: D. SAUNDERS CHECKED BY: TAC	TIAG	<u> </u>	5214 Bonsai Street • Moorpark, CA 93021		
-	RELEASE	12/16	TAC	APPROVED BY: T. KUHN	J ( ) HAS	HASCO, TNC (888) 498-3242 • sales@hasco-inc.com			
				THESE DRAWINGS AND SPECIFICATIONS AF	www.hasco-inc.com				
				SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS		CAGE CODE:	SCALE:	SIZE:	
					SEE DATA SHEET	0T8L4	N/S	Α	
				WITHOUT THE EXPRESS, WRITTEN PERMISSION C HASCO COMPONENTS.		PART NO./DRAWING NO.		REV:	
$\Box$			-	THASCO COMPONENTS.	FINISHES:				
					SEE DATA SHEET	HA65	A-10		
TI	THIS DRAWING IS A CONTROLLED DOCUMENT		IMENT		322 37.177 311221				